




ALPHA EA215 SERIES

The Alpha® 215 Series indoor displays are LED message centers designed for light industrial, commercial and office use. They quickly display large amounts of information in 8 colors and 3 rainbow effects (red only versions are also available). These message centers are among the brightest and sharpest indoor displays available.

Messages are entered through a wireless, remote control keyboard, as easy to understand and use as an ordinary calculator. Exclusive 3-step message entry with Automode™ programming eliminates the need to learn complicated programming procedures. Within seconds, the user can create exciting visual messages that cannot be ignored.

In applications requiring multiple units to communicate important information, Alpha displays can be networked and connected to a PC, to form a powerful integrated visual information system throughout your plant or business facility.

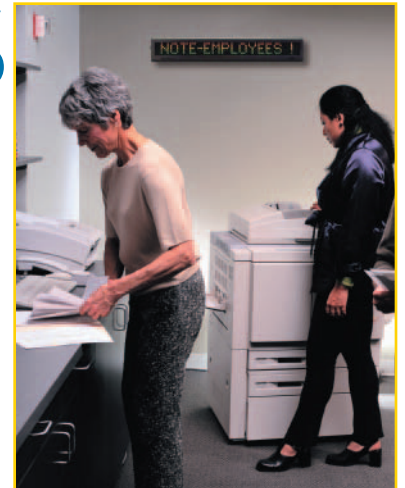

Standard Features

- Easy 3-step message entry
- Stores & displays up to 81 messages
- One year USA factory warranty
- Wireless remote control
- Real-time clock
- 6 Character fonts
- 8 true colors and 3 rainbow effects
- Easy networking
- Create your own graphics & logos

ALPHA® EA215 Specifications

Sizes	215 R/C
Case Dimensions: (With power supply)	28.9"L x 2.1"D x 4.5"H (73.4 cmL x 5.3 cmD x 11.4 cmH)
Approximate Weight:	6.25 lbs (2.13 kg.)
Display Dimensions:	27"L x 2.1"H (68.6 cmL x 5.3 cmH)
Display Array:	90 x 7 pixels
Characters Displayed in one-line (minimum):	15 characters
Display Memory:	7,000 characters (Alpha 215), 6,000 characters (Alpha 215C)

Pixel Size (Diameter):	0.2" (.05 cm)		Serial Computer Interface:	RS232 and RS485	
Pixel (LED) Color:	Each dot can be red, green, or amber Red Only unit shows only Red			Options: Ethernet LAN adapter	
Center-to-Center Pixel Spacing (Pitch):	0.3" (0.8 cm)		Power:	Input: 5A, 35W, 7 VAC 120 VAC OR 230 VAC adapter available	
Character Size:	2.1" (5.3 cm)		Power Cord Length:	10 Ft. (3m)	
Character Set:	Block (sans serif), decorative (serif), slim/wide		Keyboard:	Handheld, Eurostyle, IR remote operated	
Memory Retention:	One month typical		Case Material:	Molded plastic	
Message Capacity:	81 different messages		Limited Warranty:	One-year parts and labor, factory servicing	
Message Operating Modes:	<ul style="list-style-type: none"> – 25 consisting of: Auto mode Interlock, Roll (6 directions), Rotate, Sparkle-On, Twinkle, Spray-on, Slide-Across, Switch, Wipe (6 directions), Starburst, Flash, Snow, Scroll Condensed Rotate – Continuous message entry with automatic centering in any mode – User programmable logos and graphics – Five hold speeds 		Agency Approvals:	<ul style="list-style-type: none"> – 120 VAC Model: Power supply has UL/CSA listing. – 230 VAC Models: Complies with EN 60950: 1992 (Europe). – FCC Part 15 Class A – CE Marked 	
Built-in Animations:	Cherry Bomb Exploding, Don't Drink and Drive, Fireworks, Slot Machine, No Smoking, Running Moving Auto, Welcome and Thank You		Operating Temperature:	32° to 120°F, 0° to 49°C	
Real-Time Clock:	Date and time, 12 or 24 hour format, maintains accurate time without power for up to 30 days typical		Humidity Range:	0% to 95% non-condensing	
			Mounting:	Hardware to accommodate ceiling or wall mounting	

ENTECH SIGNS LLC - ALPHA LED
1905 WEST ARBOR ROSE
GRAND PRAIRIE, TX 75050
972-641-0390
WWW.ALPHA-LED.COM
WWW.LEDTICKER.COM